

REQUEST A QUOTE



Anvil Industrial Doors
 85 Christable Way, Landsdale,
 Western Australia, 6065
 PO Box 1767, Wangara WA 6947
 Phone: (08) 9302 3355
 Fax: (08) 9302 3399

AL77 Shutters

AL77 Roller Shutter


77mm Aluminium Roller Shutter

SECURITY, STRENGTH & CORROSION RESISTANT

The AL77 'Quiet Achiever' is ideal for domestic doors and school shutters. It features unique 'silenced slats' that quietens the slat 'rattle' associated with normal door operation.

The doors are made from corrosion resistant aluminium providing better quality, less maintenance and greater longevity. They are available in plain, perforated or slotted with polycarbonate refills.

Maximum opening width 5.7m, height 3.5m. Other heights available by application.

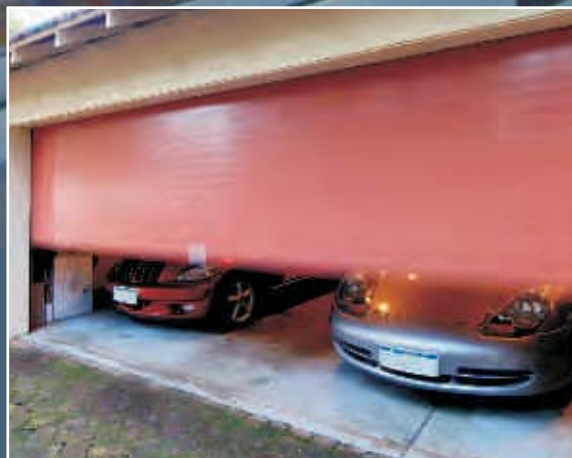



Specifications

MOTOR

Tubular brake motor 300 nm, 240 volt, 4.2 amps, 8 rpm and 50 Hz

CONTROL

Key switch deadman up / down controller or remote control.

DRUM

The drum is manufactured using 127 mm ID x 2.0 mm steel tubing

CURTAIN

Extruded aluminium interlocking slat.

Slat size 77 mm x 1.2 mm single layer.

Material weight 520 grams per metre.

6.8 kilograms per metre squared.

Curtain has rubber blade insert for quiet and smooth operation.

Slotting nominally 41 mm x 500 mm to requirements or curtain can be perforated.

GUIDES


Extruded aluminium 80 mm x 34 mm x 2 mm wall thickness with 5mm felt inserts both sides.

BOTTOM RAIL

Extruded Aluminium box section 77 mm high x 17 mm width and rubber weather strip inserts.

FINISH

Full range of powder coated colours.

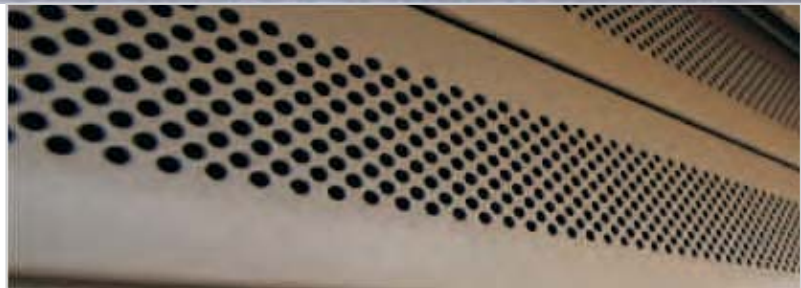





NOTES

A series of horizontal dotted lines for writing notes.